


# SUPERPLUS: THE BEST CLAMPING FOR YOUR CNC ROUTER

HSK63E/F • 462E • OZ25 • DIN6388

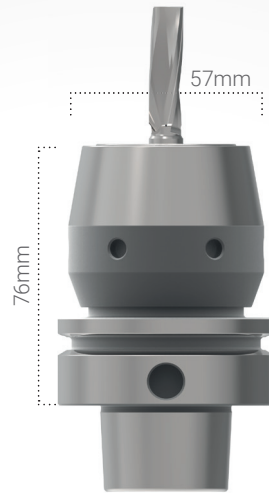

**Clamping without collet nut**  
Thanks to our new quick action lock.

**Torque wrench adapter available**  
For safety clamping up to 100Nm

**Compatible with SINO-T**  
locking



## Advantages:

- New compact design
- Highest runout precision (0,001-0,004mm)
- Ballbearing inside

## Technical data:

- Manufactured according to DIN69893-6
- Suitable for all 462E collets (RDO35/OZ25)
- Clamping range 2mm to 25,4mm (1")
- Hardened
- Balanced to 24.000rpm

## Operating tools:

- Manual spanner wrench (58-62)
- Torque wrench adapter (16mm spigot, up to 100Nm)